


Hiding your wifi from view.

First, open a web browser and type 192.168.1.1 in your address bar.

Username: Menara

PW: Menara

You should then see the screen below. Under Home Network click on Wireless.

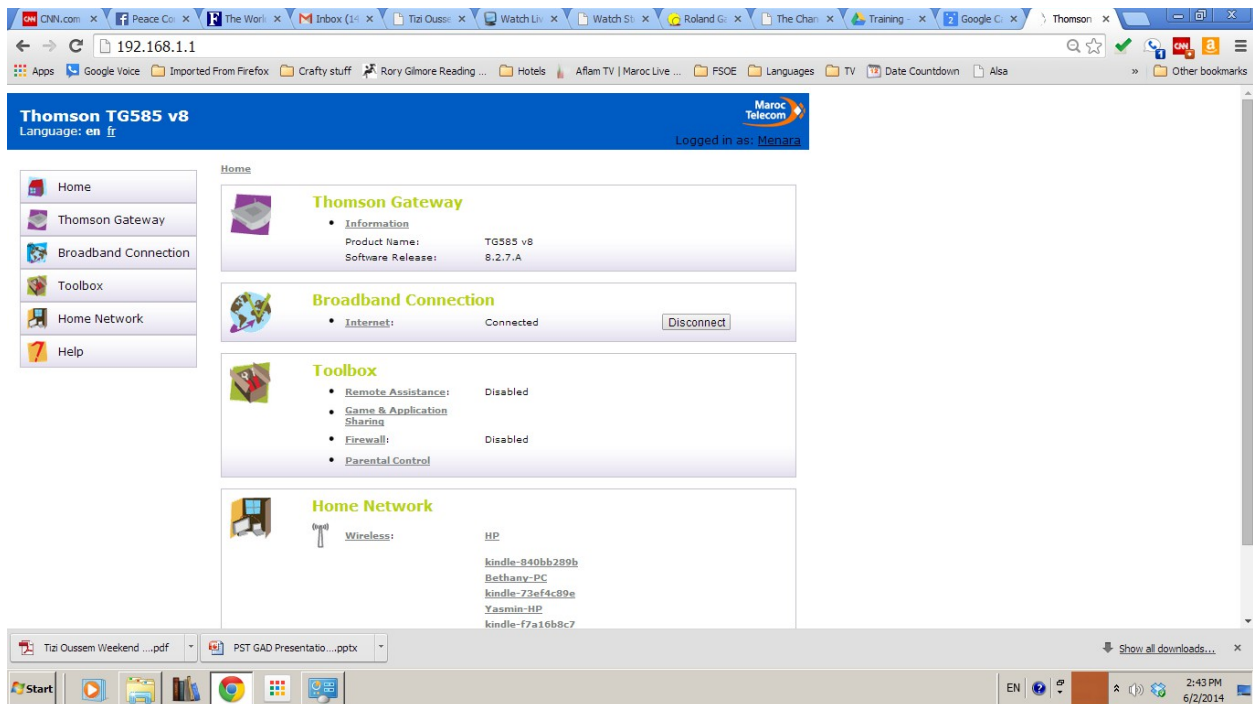

The screenshot shows a web browser window displaying the Thomson TG585 v8 web interface. The browser's address bar shows the IP address 192.168.1.1. The interface is in English and shows the user is logged in as 'Menara'. The main content area is divided into several sections:

- Thomson Gateway:** Information section showing Product Name: TG585 v8 and Software Release: 8.2.7.A.
- Broadband Connection:** Internet status is 'Connected' with a 'Disconnect' button.
- Toolbox:** Remote Assistance, Game & Application Sharing, Firewall, and Parental Control are all 'Disabled'.
- Home Network:** Wireless section showing a list of devices: HP, kindle-840bb289b, Bethany-PC, kindle-73ef4c89e, Yasmin-HP, and kindle-f7a16b8c7.

The Windows taskbar at the bottom shows the Start button, several application icons, and the system tray with the date and time (2:43 PM, 6/2/2014).

On the screen below click on Configure in the top right-hand side, under the Maroc Telecom logo.

Thomson TG585 v8
Language: en fr
Logged in as: Menara

Home > Home Network > Interfaces > WLAN: ThomsonAB66BC
Overview | Details | Configure

Wireless Access Point - ThomsonAB66BC

- Configuration**
 - Interface Enabled: Yes
 - Physical Address: 08:76:FF:AB:66:BC
 - Network Name (SSID): ThomsonAB66BC
 - Interface Type: 802.11b/g/n
 - Actual Speed: 65 Mbps
 - Band: 2.4G Hz
- Security**
 - Allow New Devices: New stations are allowed (automatically)
 - Security Mode: WPA-PSK

Under Security the first line says "Broadcast Network Name." Uncheck that box. If you want to change your network name or password do it here. Make sure to write down any changes and then hit Apply.

Thomson TG585 v8
Language: en fr
Logged in as: Menara

Home > Home Network > Interfaces > WLAN: ThomsonAB66BC
Overview | Details | Configure

Wireless Access Point - ThomsonAB66BC

- Configuration**
 - Interface Enabled:
 - Physical Address: 08:76:FF:AB:66:BC
 - Network Name (SSID): ThomsonAB66BC
 - Interface Type: 802.11b/g/n
 - Actual Speed: 65 Mbps
 - Band: 2.4G Hz
 - Channel Selection: Automatic
 - Region: Europe
 - Channel: 1
 - Allow multicast from Broadband Network:
- Security**
 - Broadcast Network Name:
 - Allow New Devices: New stations are allowed (automatically)
 - Encryption:
 - Disabled
 - Use WEP Encryption
 - Use WPA-PSK Encryption
 - WPA-PSK Encryption Key: E7BB28EC02
 - WPA-PSK Version: WPA

Apply Cancel

Once your network is hidden it won't show up to new users. They will need to "Add Network" instead of picking one from the list. After it's been added it should remember the network and you won't need to reenter it.